Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 203490

MR Series

DOUBLE POLE MINI-ROCKER SWITCHES UP TO 12A 125VAC

Illuminated, non-illuminated, Soft Outlook

- 12A 125VAC, 10A 250VAC 1/4HP (CSA)
- 10A 125VAC, 8A 250VAC 1/4HP (UL)
- 10(4)A 250V~T125/55 (VDE, SEMKO, DEMKO, NEMKO, FIMKO, SEV)
- Initial contact resistance: 50m ohm MAX.
- Insulation resistance: 100M ohm MIN. @ 500VDC
- Dielectric strength: 1,000VAC for 1 minute
- Electrical life: 10,000 cycles
- Temperature range: -20 to +100^{0}C
- Switch for Class II appliance
- Base: Nylon 66, UL rated 94V-2 min
- Actuator: Nylon 66, UL rated 94V-2 min
- Spring: piano wire
- Movable contact arm: phosphorous bronze
- Movable contact: Silver-cadmium alloy
- Stationary contact: Silver-cadmium alloy
- Terminals: Silver plated copper, soldering, quick disconnect
- Lamp: neon



PANEL CUT-OUT

Snap-in mounting

x=panel thickness

X	Dim.Y	Dim.Z
0.75 to 1.25 mm	19.1+0/-0.1	12.9+0/-0.1
1.25 to 2 mm	19.2+0/-0.1	12.9+0/-0.1
2 to 3 mm	19.5+0/-0.1	12.9+0/-0.1

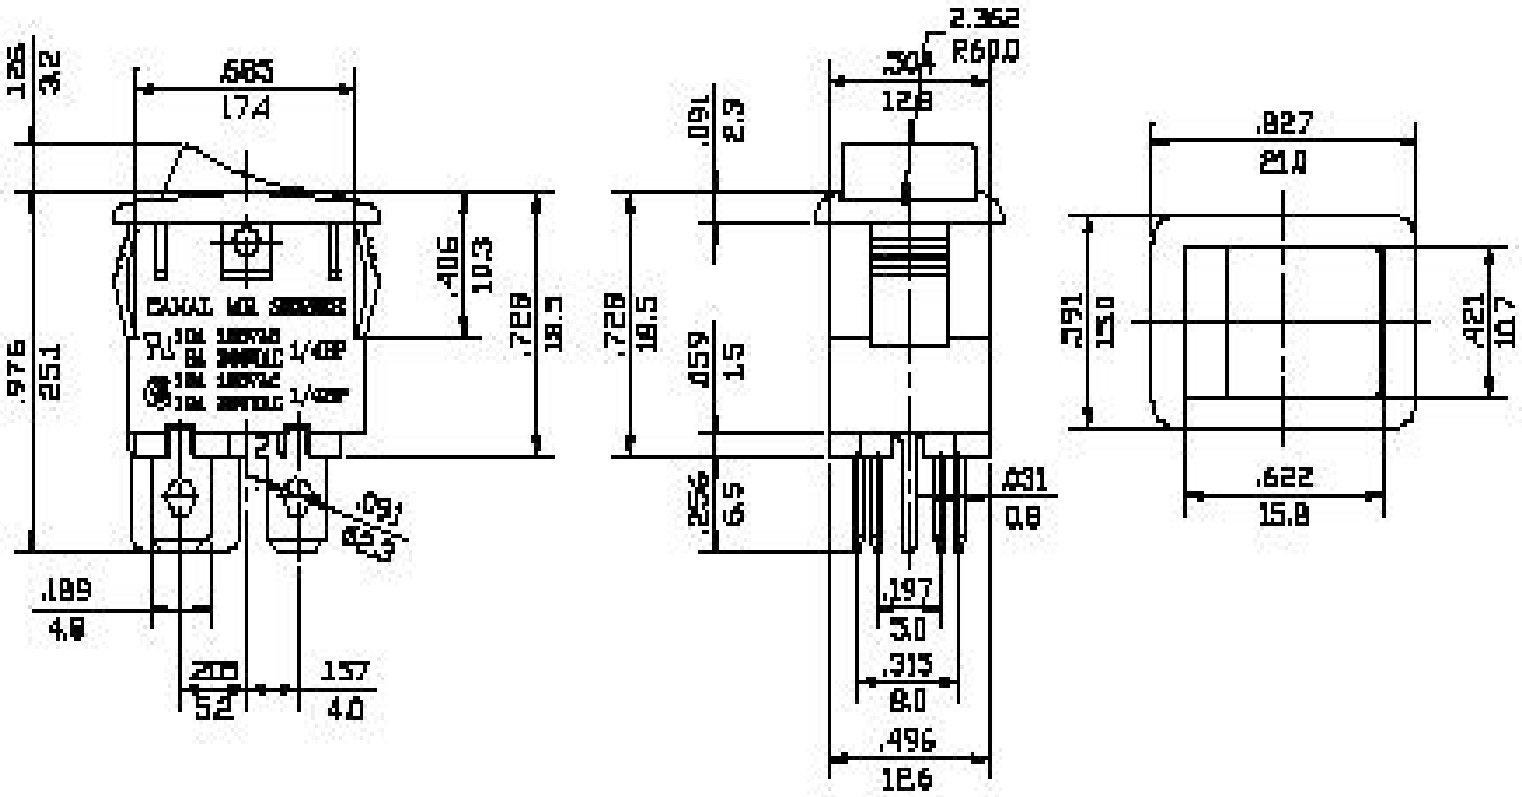
.685
17.4
.406
10.3
.728
18.5
.976
25.1
.189
4.8
.197
5.0
.315
8.0
.496
12.6
.827
21.0
.791
15.0
.622
15.8
.421
10.7
.031
0.8
2.362
R60.0
.091
2.3
.059
1.5
.256
6.5
1/4BSP
1/4BSP